


Biometric Access Control Made Simple

BioConnect Enterprise is currently integrated with over 25 access control systems to provide seamless synchronization of all data.

Add biometrics to your Access Control System with the following components:

- 1 Integration Software
- 2 Biometric Hardware
- 3 Access Control Software

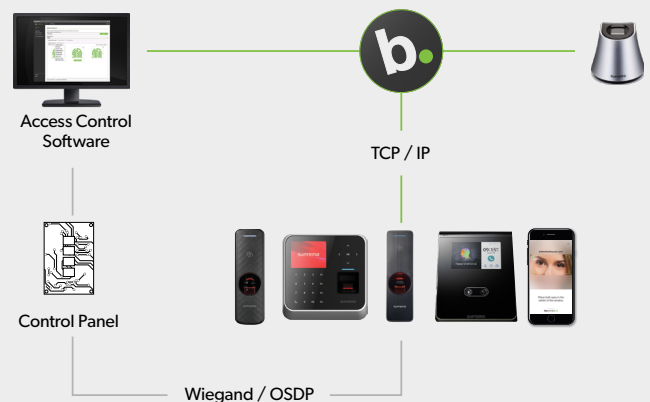

1 Integration Software



BioConnect Enterprise makes it easy and cost effective to integrate biometrics into your current access control system. With simple, secure and scalable features and functions, it is tailor-made for enterprises where verifying the true identity of people is critical for secure access to both physical facilities and software applications.

Features and Specifications:

- Advanced Template Management
- Access Control Release Level Certification
- Face/Finger Device Certification
- Scalable Architecture

2 Biometric Hardware



BioConnect is integrated with Suprema biometric devices to provide assurance at all access points. Suprema is a global leader in biometrics and securities technology.

By combining world renowned biometric algorithms with superior engineering, Suprema is able to continually develop and manufacture reliable industry leading products including fingerprint and facial recognition access control.

3 Access Control Software



BioConnect Enterprise is currently integrated with over 20 access control systems to provide seamless synchronization of all data. Please visit www.bioconnect.com for a full list of compatible systems.

Support and Resources

BioConnect is dedicated to helping you successfully promote and sell Suprema and your Access Control Management solution.

bioconnect.com/support
sales@bioconnect.com
1-855-368-3743

Product Specifications



		FaceStation 2	BioStation 2	BioEntry W2	BioEntry P2	BioLite N2	BioMini 2
Core Functions	Product Code	BC-FSA (multiCLASS), BC-FSD (EM)	BC-BSI (iCLASS SE), BC-BSH (Prox), BC-BSM (Mifare), BC-BSE (EM)	BC-BWA (multiCLASS), BC-BWH (Prox), BC-BWD (EM)	BC-BPD (EM), BC-BPA (multiCLASS)	BC-BNA (multiCLASS), BC-BND (Mifare)	BIOMINI2
	Application	Access Control	Access Control	Access Control	Access Control	Access Control	Enrollment
	Authentication	Facial/Pin/Card	Finger/Card/Pin	Finger/Card	Finger/Card	Finger/Card/Pin	-
	Card Options	125 KHz EM, 13.56MHz: MIFARE, MIFARE Plus, DESFire/EV1, FeliCa, NFC, 2.4GHz BLE 13.56 MHz iClass SE/ SEOS	125 KHz EM, 125KHz Prox, 13.56 MHz Mifare, 13.56 MHz iClass SE/ SEOS	125 KHz EM, 125KHz Prox, 13.56 MHz Mifare, 13.56 MHz iClass SE/ SEOS	125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire/EV1, FeliCa, NFC, 13.56 MHz iClass SE/ SEOS	125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire/EV1 & 2.4GHz BLE, 13.56 MHz iClass SE/ SEOS	-
Capacity	Template Capacity	30,000 (1:1), 3,000 (1:N)	500,000 (1:1), 20,000 (1:N)	500,000 (1:1), 200,000 (1:N)	10,000 (1:1), 10,000 (1:N)	10,000 (1:1), 10,000 (1:N)	-
	Log Capacity	5,000,000 (text), 50,000 (image)	3,000,000 (text)	1,000,000 (text)	1,000,000 (text)	1,000,000 (text)	-
Interfaces	TCP/IP	Yes	Yes	Yes	Yes	Yes	-
	RS485/ OSDP	1ch Host or Slave (Selectable)	2 Channels	1ch Host or Slave (Selectable)	1ch Host or Slave (Selectable)	1ch Host or Slave (Selectable)	-
	Weigand	1ch Input, 1ch Output	1ch Input, 1ch Output	1ch Input or Output (Selectable)	1ch Input or Output (Selectable)	1ch Input or Output (Selectable)	-
Hardware	CPU	1.4 GHz Quad Core	1.0 GHz Single Core	1.2 GHz Quad Core	1.0GHz	1.2 GHz	-
	Memory	8GB Flash + 1GB RAM	8GB Flash + 256MB RAM	2GB Flash + 256MB RAM	8GB Flash + 64MB RAM	4GB Flash + 64MB RAM	-
	LCD	4 Colour TFT	840px Graphic LCD	-	-	1.77" Color LCD	-
	LED Indicator	-	Multi Color LED	Multi Color LED	Multi Color LED	-	-
	IP Rating	-	IP65 (Dust & Water Protection)	IP67, IK09	-	IP67 (Dust & Water Protection)	-
	Tamper	Supported	Supported	Supported	Supported	Supported	-
	POE	Not Supported	Supported	Supported	Not Supported	Not Supported	-
	Operating Voltage	24V DC	12V DC	12V DC	12V DC	12V DC	-
	Operating Current	2.5 A	1.5 A	1 A	1 A	1.5 A	-
	Operating Temperature	-20-50°C	-20-50°C	-20-50°C	-20-50°C	-20-50°C	-20-50°C
Dimensions	141 x 164 x 125mm	142.24 x 144.78 x 45.72mm	50.8 x 172.72 x 43.18 mm	50 x 164 x 37.5mm	58 x 190 x 44 mm	66 x 90 x 58 mm	
BioConnect Enterprise		Feature	Max. Devices	Synchronized User Database	Recommended Users	Suprema V1 Hardware	Suprema V2 Hardware
	Basic	BC-BSC	20	Yes	> 50	Yes	Yes
	Standard	BC-STND	50	Yes	> 50	Yes	Yes
	Pro	BC-PRO	100	Yes	> 50	Yes	Yes
	Master	BC-MAS	300	Yes	> 50	Yes	Yes

Activate Your Software

Activate Software with Proof of Purchase at security.bioconnect.com/software-activation/

bioconnect.com/support
sales@bioconnect.com
 1-855-368-3743